

POLELED



PROFESSIONAL FLAGPOLE LIGHT



SPECIFICATION SHEET POLELED BASIC AND EXTENDED


POLELED BASIC



POLELED EXTENDED



POLELED O2

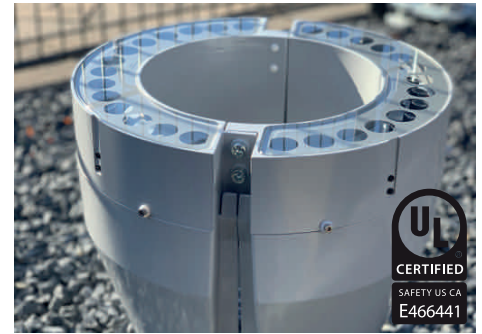

SPECIFICATIONS POLELED BASIC

Power	24 Watt
Light output	2300 lumen
Voltage	24 volt DC
Lifetime LEDs	+50,000 hours
Material	Aluminium
Number of LEDs	12 pcs CREE
Lighting color	4000K - 5000K
Warranty	5 years
Angle	11°
IP.	IP65
Size (WxH)	9.1 x 7.1 inch
Cable length	23 ft.
Housing	Powdercoat painted

Suitable for poles with a diameter up to 4.5 inch ø

SPECIFICATIONS POLELED EXTENDED

Power	38 Watt
Light output	3250 lumen
Voltage	24 volt DC
Lifetime LEDs	+50,000 hours
Material	Aluminium
Number of LEDs	10 pcs CREE
Lighting color	3000K - 4000K - 5000K
Warranty	5 years
Angle	11°
IP.	IP65
Size (WxH)	10.2 x 8.3 inch
Cable length	33 ft.
Housing	Powdercoat painted

Suitable for poles with a diameter up to 5.7 inch ø

SPECIFICATIONS POLELED O2

Power	90 Watt
Light output	9500 lumen
Voltage	24 volt DC
Lifetime LEDs	+50,000 hours
Material	Aluminium
Number of LEDs	28 pcs CREE
Lighting color	4000K - 5000K
Warranty	5 years
Angle	11°
IP.	IP65
Size (WxH)	14 x 12.5 inch
Cable length	33 ft.
Housing	Powdercoat painted

Suitable for poles with a diameter up to 9 inch ø

SERIES:

FLAG AND BANNER LIGHTING

MODEL SIZE:

BASIC
EXTENDED
O2

HOUSING COLOR:

WHITE
GREY
COLOR
additional fee will be charged

LED COLOR TEMPERATURE:

5000 K*
4000 K*
3000 K**



* STANDARD OPTION
** ONLY AVAILABLE IN EXTENDED MODEL