

Smart LED Parking Lot / Area Fixture



Over Engineered for Optimal Performance
Superior Design. Unmatched Intelligence. Affordable Price.

The SAL Smart+ LED Area Light incorporates the most functional and highest quality distribution lens system in its class which allows it to provide superior illumination and precise glare control. Its unique cooling channel design allows for efficient heat dissipation and ensures a long lifespan and the versatile mounting options provide for simple and low-cost distribution changes in the field.

PRODUCT SPECIFICATIONS


Delivered Light Output: 17,000 – 51,000 Lumens
Input Power: 100w, 150w, 240w, 300w
Efficacy: 170 Lm/w
L70 Lifetime: >180,000 Hours
CRI: >70
CCT: 3000K, 4000K, 5000K (Standard)
Voltage: 100 – 277VAC (347 – 480V available)
Dimmability: 0 – 10V Wireless Control
Distribution: Type III, Type V
IP Rating: IP66 (Outdoor Wet Locations)
Operating Temperature: - 40°F to 122°F
Warranty: 10 Years



MOUNTING OPTIONS



DISTRIBUTION OPTIONS

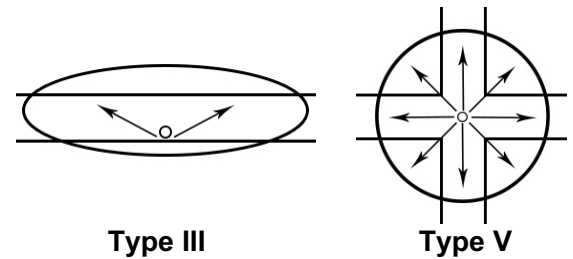

| Series | Wattage | Distribution | Mount | CCT | Finish | Voltage | Accessories |
|-------------|---------|------------------------|------------------------------------|------------|------------------------------------|---------------------------|--------------------------------------|
| EPT01-A-SAL | 100 | T3 = Type III (Medium) | SAM = Square Pole Arm Mount | 30 = 3000K | DB = Dark Bronze (Standard) | Blank = 100-277VAC | PIRR = PIR Programming Remote |
| | 150 | T4 = Type IV | RAM = Round Pole Arm Mount | 40 = 4000K | BK = Black | HV = 200-480VAC | CB = Custom Branding |
| | 240 | T5 = Type V | SF = Slip Fit Mount | 50 = 5000K | WH = White | | |
| | 300 | | TM = Trunnion Mount | | CC = Custom Color | | |

EXAMPLE:

EPT01-A-SAL-240-T3-SAM-50-DB-PIRR

1800 Augusta Drive, Suite 232 Houston, TX 77057
 Please send Pos to orders@efficientpowertech.com

www.EfficientPowerTech.com
 Welcome to the Energy Future