


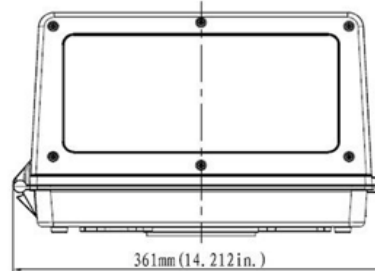
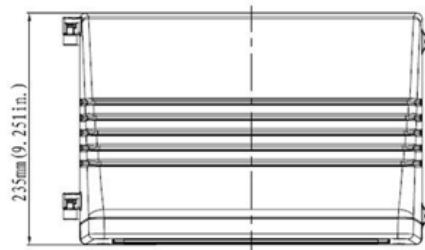
Project:	_____
Contact:	_____
Estimated Qty:	_____
Notes:	_____


Feature and Benefits:

- Widely used for outdoor commercial general lighting purpose
- Replace 175-250 MH or HID Fixtures
- Polycarbonate optical lens with UV stabilizer
- Light weight and designed to be install-friendly for US standards
- Optional for photocell and 347 VAC can be customized
- 6 Year Warranty


Dimensions and size:

Technical Data	
CRI	>80
Beam Angle	140°
Operation Temp.	- 30°C ~ 60°C
Lifespan	50,000 Hours
Waterproof Rating	Wet Location
Lumen per watt	> 90 lm/w


Ordering Information

Model #	CCT	Voltage	Wattage	Lumen
LEDFCUWP45W50K	5000K	120- 277VAC	45W	4900Lm
LEDFCUWP70W50K	5000K	120 - 277VAC	70W	7350Lm

Efficient Power Tech, LLC
 (713) 783-2367
www.EfficientPowerTech.com
 1800 Augusta Drive, Suite 232 Houston, TX