


| |
|----------------------|
| Project: _____ |
| Contact: _____ |
| Estimated Qty: _____ |
| Notes: _____ |


Feature and Benefits:

- Widely used for gas station, outdoor high exterior ceiling porch, hallway and other general commercial lighting purpose
- Replace 400W HID light fixture
- Design to provide an even and smooth lighting distribution to the ground
- Pendant mounting or direct surface mounting
- 6 years warranty



Dimensions and size:

| Technical Data | |
|-------------------|---------------|
| CRI | > 75 |
| Beam Angle | 120° |
| Operation Temp. | - 30°C ~ 60°C |
| Lifespan | 50,000 Hours |
| Waterproof Rating | Wet Location |
| Lumen per watt | >120 lm/w |

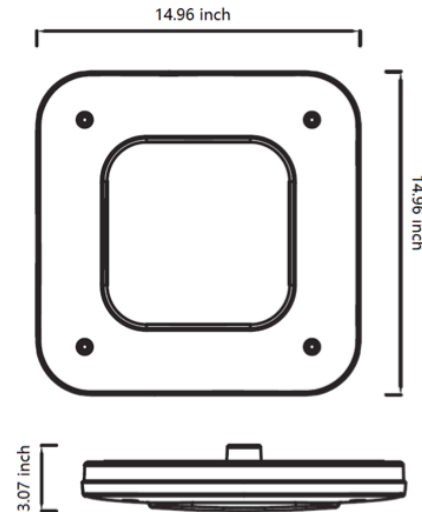
Ordering Information

| Model # | CCT | Voltage | Wattage | Lumen |
|----------------|-------|-------------|---------|-----------|
| LEDCNP100W50K2 | 5000K | 120-277 VAC | 100W | 12,000 Lm |
| LEDCNP130W50K2 | 5000K | 120-277 VAC | 130W | 15,600 Lm |

Photometric

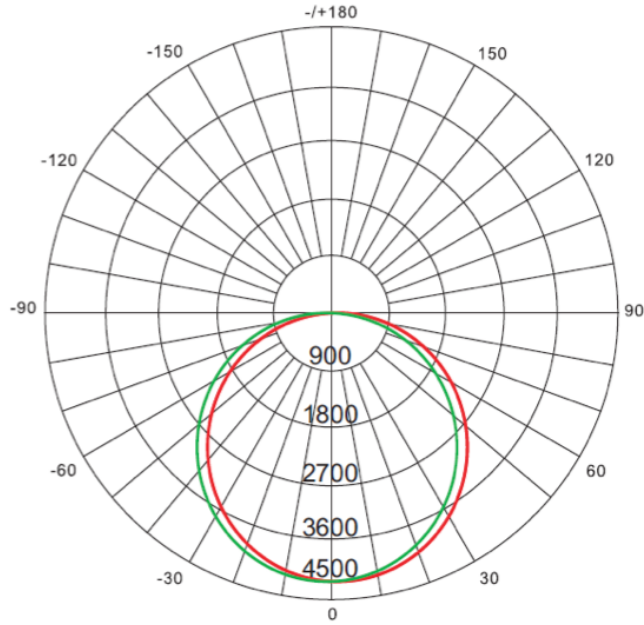

Installation



figure 1



figure 2

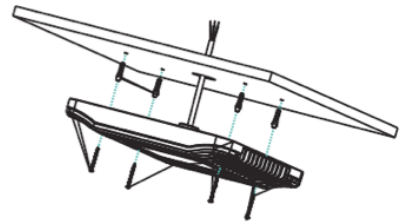


figure 3