


LED 2x4 Architectural Troffer

Applications

Commercial Offices, Classrooms

NEW FEATURES!

- SWITCHABLE WATTAGE OPTIONS
- TUNABLE CCT OPTIONS

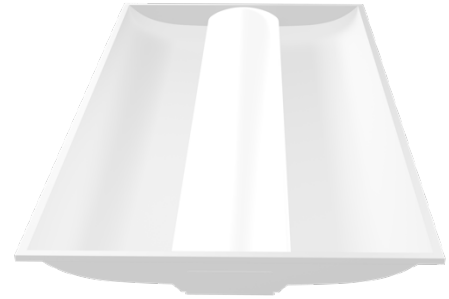

Performance Summary

Delivered Light Output: 3,000 – 6,250 Lumens

Input Power: 30w 40w 50w

Efficacy: 125 Lm/W

Lifetime: >50,000 hours

CRI: >80

Tunable CCT: 3000K, 4000K, 5000K


Input Voltage: 120-277V

Dimming: 1-10V

Compliance: DLC, UL Listed

Operating Temp: -4F – 113F

Warranty: 5 Years

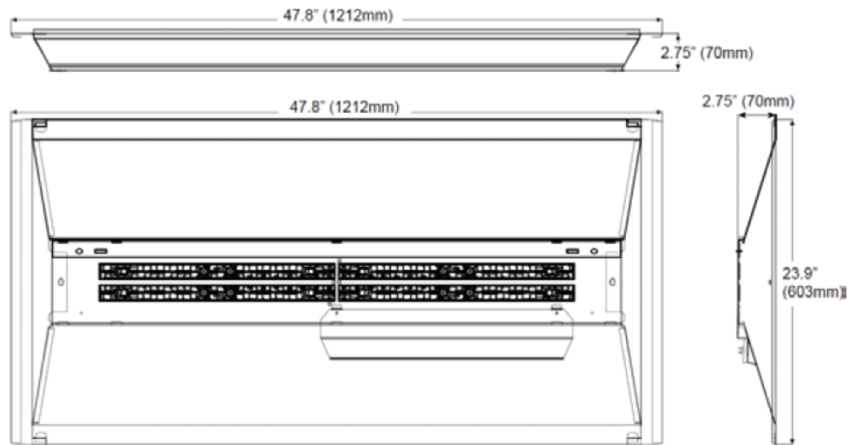

Part Number	L70 Lifetime (hrs.)	Warranty	Lumens	Wattage	Lm/W
EPT01-LEDTF-2X4-UT-30W-DIM-LIR	>50,000	5 Years	3,750Lm	30w	125 Lm/W
EPT01-LEDTF-2X4-UT-40W-DIM-LIR	>50,000	5 Years	5,000Lm	40w	125 Lm/W
EPT01-LEDTF-2X4-UT-50W-DIM-LIR	>50,000	5 Years	6,250Lm	50w	125 Lm/W