

## SPECIFICATION FEATURE

THE NEW WALL PACK APPEARANCE COMPLI-  
MENTS OUR AREA LIGHT FIXTURE

0-10V DIMMING

TEMPERED UV COATED LENS

EXTERNALLY MOUNTED EMERGENCY BATTERY  
BACKUP OPTION

## 70W - 100W

INPUT VOLTAGE	120 - 277 VAC / 347-480VAC
CRI	>70
LUMEN PER WATT	>139 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-40°F ~ 104°F
LUMEN	70W - 9550 LM 100W - 13,850 LM




# ORDERING OPTIONS:

EXAMPLE: LEDSCU 70W 50K

## 70W - 100W

LEDSCU	70W	50K	[BLANK]	[BLANK]	[BLANK]
<b>SERIES</b> LEDSCU	<b>RATED WATTAGE</b> 70W 70 WATT 100W 100 WATT	<b>COLOR TEMP</b> 40K 4000 KELVIN 50K 5000 KELVIN	<b>INPUT VOLTAGE</b> BLANK 120 - 277 VAC HV 347-480 VAC	<b>FINISHING</b> BLANK DARK BRONZE	<b>ACCESSORIES</b> BLANK NO ACCESSORIES -PCMWP PHOTOCELL -MSMWP MOTION SENSOR -EBMWP EMERGENCY BATTERY BACKUP

# DIMENSIONS:

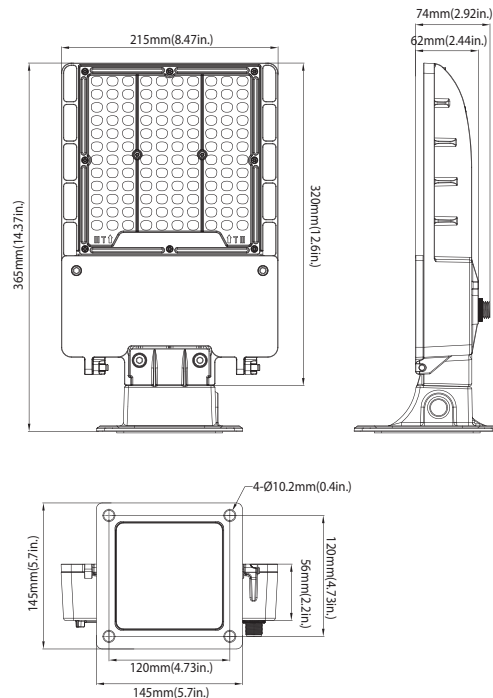



## PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
70W	120-277V/347-480VAC	70	9550LM	136 LM/W	9600LM	137 LM/W
100W	120-277V	70	13850LM	139 LM/W	13900LM	139 LM/W